


# Airius Model 10 **Product Information Sheet**

10DS-230V

Page 1 of 2



# DIMENSIONS

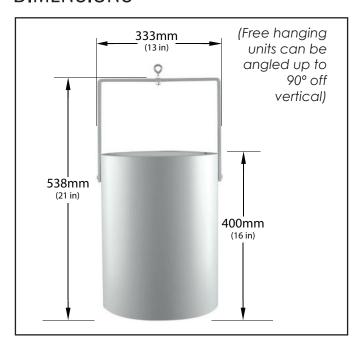

# **PROPERTIES**

ZE		Standard	
UNIT SIZE	Weight:	6.8 kgs (15 lbs)	
S	Height to Rim:	400 mm (16 in)	
	Total Height:	538 mm (21 in)	
	Diameter:	333 mm (13 in)	

)R	230V		
MOTO	Watts* @ 50 htz:	12	
Σ	RPM* @ 50 htz:	980	
	CFM* @ 50 htz (m3/hr):	318 (540)	
	AMPS* @ 50 htz:	0.06	
	*Motor data provided by motor manufacturer and is subject to change at anytime		

# **DESIGNER SERIES RANGE**

- MODEL 10

## **COVERAGE**

• Ceiling Height = 2.5m - 4m (8 - 13 ft) • Nozzle Height = 2m - 3.5m (6.5 - 11 ft) Diameter = 8m - 10m (26 - 33 ft)= 48 $m^2$  - 72 $m^2$  (516 - 775 ft<sup>2</sup>) Floor area

# **MOTOR**

- Single phase, shaded pole, single speed (variable with optional speed control), axial motor
- Sealed bearings, no lubrication required

#### **OPERATING TEMPERATURES**

• Operating Temp = -20°C (-4°F) to 70°C (158°F) • Thermal shut off =  $110^{\circ}$ C (230°F)

 Reset  $= 90^{\circ}C (195^{\circ}F)$ 

#### HOUSING

- · Aluminium cylindrical housing
- Powder coated
- Internal PC/ABS resin fixed blade stator
- 5VA flame rating











## **NOISE LEVEL**

 $0 - 21 \, dB(A)$ 3 Metres

# **INGRESS PROTECTION**

• IP55 Rated

#### **COLOUR**

- Cool gray 2C Off white as standard
- Can be tailor painted to your colour specifications

# **ACCESSORIES & OPTIONS**

• Speed Controls - On/off speed controls allow for variable output from Airius unit. 1 AMP and 5 AMP controls available

#### WARRANTY

- 5 years parts and workmanship from shipping date
- 120 day money back guarantee (T's & C's apply)



# Airius Model 10 Product Information Sheet


10DS-230V

Page 2 of 2



# **PROPERTIES**

## **VELOCITY PROFILE**

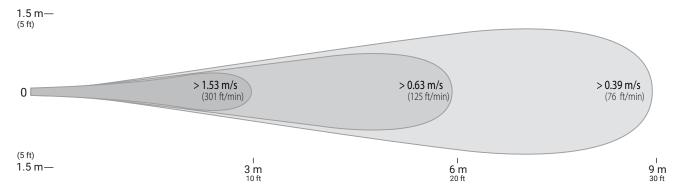


# **PLACEMENT**

## **PREPARATION**

- Install electrical circuit(s) and outlet(s) in accordance with national and local electric codes
- Outlets should generally be mounted vertically unless a "twist/locking" type is being used
- Wall switch may be installed in circuit to disable power and prevent electrical hazards when servicing
- Confirm electrical continuity of Airius unit on the ground before permanently mounting in the ceiling

# INSTALLATION

- Hang vertically as high in the ceiling as possible Typically 300mm (12") - 450mm (18") from the roof deck to intake
- The Airius unit performs best when air column from the nozzle is unimpeded to the floor
- Use professionally installed hardware, capable of supporting a minimum of five times the weight
- Hardware to hang the unit includes but is not restricted to: Hooks, chains, cables, carabiners, bridle rings, beam clamps and bolts
- Density of the placement is directly related to the effectiveness, performance and savings
- Mount out of reach from people and animals
- Floor plans, mezzanines, office locations, machinery, people placement, plumbing, lighting, duct work, electrical systems, natural light/air systems, cranes, doors, windows, ventilation and fire suppression systems are all factors in properly locating the Airius system within the ceiling

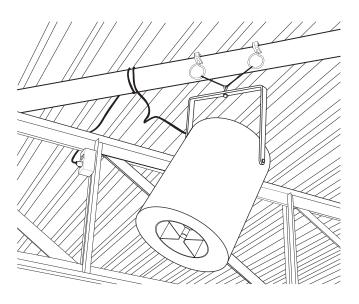

## **OPERATION**

- Designed to operate 24 hours-a-day, 7 days-aweek to maintain thermal equalization/humidity equalization
- Use optional speed control to fine tune RPM if needed

# **MAINTENANCE**

- Frequency of cleaning will vary by application and environment
- You may clean the plastic housing with a damp warm cloth, using mild household detergents
- Do not use petroleum products, thinners or solvents to clean any part of the Airius unit
- If the Airius unit fails, contact manufacturer

Airius LLC, © 2011. All Rights Reserved.