

Airius PureAir⁺ NPBI Model 45 Product Information Sheet

45-PA+-230V

Page 1 of 3



DIMENSIONS



PUREAIR* NPBI STANDARD SERIES RANGE - MODEL 45

DESCRIPTION

- Air purification and odour control destratification and airflow circulation fan.
- Features integrated Needlepoint Bipolar Ionization (NPBI) System.
- Emits both positive (H+) and negative (O2-) ions.
- Ions surround harmful pathogens and react as Hydroxyl (OH) radicals. This process removes hydrogen from the cell walls of microbes, inactivating harmful pathogens at a cellular level.

FEATURES

- 99.9%+ effective at neutralising COVID19 (SARS-CoV-2).
- Inactivates surface germs, bacteria & viruses by 99%+.
- Inactivates airborne germs, bacteria & viruses by 99%+.
- Reduces odours by 99%+.
- Reduces VOCs, gases & vapours by 99%+.
- Energy Savings of up to 40% by destratifying and reducing outdoor air intake by up to 75%.
- Reduces pressure loss by keeping HVAC coils clean without expensive UV system.
- Particle reduction and smoke control.
- Balances internal building temperatures.
- No maintenance required.

PROPERTIES

ZE		Standard
UNIT SIZE	Weight:	6.3 kgs (14 lbs)
N	Height to Rim:	455 mm (18 in)
	Total Height:	605 mm (24 in)
	Diameter:	375 mm (15 in)

)R		230V
MOTOR	Watts* @ 50 htz:	54
×	RPM* @ 50 htz:	1,450
	CFM* @ 50 htz (m3/hr):	595 (1,010)
	AMPS* @ 50 htz:	0.19
	*Motor data provided by motor manufacturer and is subject to change at anytime	

SES		AIRFLOW
OVERAGE	Ceiling Height:	8m - 10m (26 - 32 ft)
	Nozzle Height:	7.5m - 9m (24 - 29 ft)
	Diameter:	Up to 16m (52 ft)
V	Floor area:	Up to 201m² (2163 ft²)
		*Coverages can vary dependent upon environment and load.



MOTOR

- Single phase, shaded pole, single speed variable with optional speed control), axial motor.
- Sealed bearings, no lubrication required.

NPBI SYSTEM

- Self-cleaning, maintenance free Needlepoint Bipolar Ionization air and surface purification system.
- Ozone free system.



Airius PureAir⁺ NPBI Model 45 Product Information Sheet


45-PA+-230V

Page 2 of 3



PROPERTIES

VELOCITY PROFILE

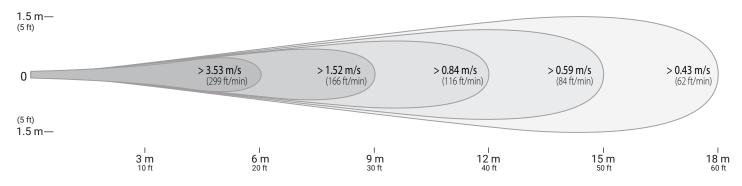

HOUSING & COMPONENTS

- ABS Resin Inc. internal fixed blade stator.
- 5VA flame resistance rating.
- 1.8m (6') steel safety leash cable (fastened to housing).

OPERATING TEMPERATURES

• Operating Temp = -25°C (-13°F) to 70°C (158°F)

• Thermal shut off = 135°C (275°F)

• Reset = 125°C (255°F)

NOISE LEVEL

• 3 Metres $= 0 - 35 \, dB(A)$

COLOUR

- White as standard.
- Can be tailor painted to your colour specifications.

ACCESSORIES & OPTIONS

- Suspended Series kit Allows Airius unit to be mounted in a suspended ceiling grid.
- Speed Controls On/off speed controls allow for variable output from Airius unit. 1 AMP and 5 AMP controls available.

OPERATION

 Designed to operate 24 hours-a-day, 7 days-a-week to protect against airborne mould, bacteria, viruses, odours and VOCs and save heating & cooling costs.

MAINTENANCE

- No maintenance required.
- If the NPBI unit fails, contact manufacturer.

WARRANTY

- 5 years parts and workmanship from shipping date on fan unit.
- 120 day money back guarantee UK only (T's & C's apply).

SAFETY PRECAUTIONS

- General safety measures and precautions should be followed when working with any electrical device.
- No additional safety measures are necessary for working with either the fan or NPBI system.



Airius PureAir⁺ NPBI Model 45 Product Information Sheet

45-PA+-230V

Page 3 of 3




PLACEMENT

PREPARATION

- Install electrical circuit(s) and outlet(s) in accordance with national and local electric codes
- Outlets should generally be mounted vertically unless a "twist/locking" type is being used
- Wall switch may be installed in circuit to disable power and prevent electrical hazards when servicing
- Confirm electrical continuity of Airius unit on the ground before permanently mounting in the ceiling

INSTALLATION

- Hang vertically as high in the ceiling as possible Typically 300mm (12") - 450mm (18") from the roof deck to intake
- The Airius unit performs best when air column from the nozzle is unimpeded to the floor
- Use professionally installed hardware, capable of supporting a minimum of five times the weight
- Hardware to hang the unit includes but is not restricted to: Hooks, chains, cables, carabiners, bridle rings, beam clamps and bolts
- Density of the placement is directly related to the effectiveness, performance and savings
- Mount out of reach from people and animals
- Floor plans, mezzanines, office locations, machinery, people placement, plumbing, lighting, duct work, electrical systems, natural light/air systems, cranes, doors, windows, ventilation and fire suppression systems are all factors in properly locating the Airius system within the ceiling

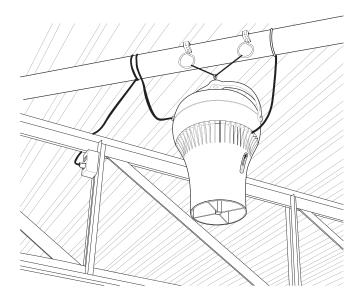

OPERATION

- Designed to operate 24 hours-a-day, 7 days-aweek to maintain thermal equalization/humidity equalization
- Use optional speed control to fine tune RPM if needed

MAINTENANCE

- Frequency of cleaning will vary by application and environment
- You may clean the plastic housing with a damp warm cloth, using mild household detergents
- Do not use petroleum products, thinners or solvents to clean any part of the Airius unit
- If the Airius unit fails, contact manufacturer